

PLANTING SCHEDULE - FEDERAL/EDWARD TEACH ROAD

TREES	BOTANICAL / COMMON NAME	CONT.	SIZE	SPACING
6	QUERCUS VIRGINIANA / LIVE OAK	B&B	12-14', 2" CAL.	A.I.
8	SABAL PALMETTO / SABAL PALM	BAREROOT	12-14' HT.	A.I.
SHRUBS	BOTANICAL / COMMON NAME	CONT.	SIZE	SPACING
51	ILEX VOMITORIA / YAUPON HOLLY	CONT.	3-4' HT.	6' O.C.
26	JUNIPERUS VIRGINIANA / EASTERN RED CEDAR	CONT.	6-8' HT.	6' O.C.
69	MYRICA CERIFERA / SOUTHERN WAX MYRTLE	CONT.	3-4' HT.	6' O.C.
87	SABAL MINOR / DWARF SABAL	CONT.	18-24" HT.	4' O.C.

PLANTING NOTES

1. SIZE AND GRADING STANDARDS OF PLANT MATERIAL SHALL CONFORM TO THE LATEST EDITION OF "AMERICAN STANDARD FOR NURSERY STOCK", BY THE AMERICAN HORTICULTURE INDUSTRY ASSOCIATION, INC. (ANSI Z60.1).
2. HEIGHT AND WIDTH SPECIFICATIONS INDICATED ON PLANT SCHEDULE SHALL TAKE PRECEDENCE OVER CONTAINER SIZE.
3. CONTRACTOR SHALL MULCH ALL PLANTING BEDS WITH MULCH OBTAINED FROM VILLAGE OF BALD HEAD ISLAND STOCKPILE. CONTRACTOR TO COORDINATE SCHEDULE AND DISTRIBUTION OF MULCH WITH VILLAGE REPRESENTATIVE. MAINTAIN 2" CLEAR OF BASE OF TRUNK OR STEM.
4. CONTRACTOR SHALL REMOVE ALL CONSTRUCTION DEBRIS INCLUDING GRAVEL, ROOTS, LIMBS AND OTHER DELETERIOUS MATTER WHICH WOULD BE HARMFUL, OR PREVENT PROPER ESTABLISHMENT AND/OR MAINTENANCE OF LAWN AND PLANTING AREAS.
5. IN AREAS WHERE CONSTRUCTION GRAVEL IS EMBEDDED IN THE SOIL, CONTRACTOR SHALL REMOVE CONTAMINATED SOIL TO A DEPTH OF 8" AND FILL WITH CLEAN TOPSOIL. CONTRACTOR SHALL IMPORT TOPSOIL AT NO CHARGE TO OWNER IF REQUIRED TO FILL THESE EXCAVATIONS.
6. SEE SPECIFICATIONS FOR SOIL AMENDMENT, PREPARATION AND FERTILIZER REQUIREMENTS. FERTILIZER RATES TO BE PER SOIL TEST REPORTS.
7. ANY AREA NOT DIRECTED TO RECEIVE SEED OR SOD SHALL BE MULCHED.
8. ADJUSTMENTS TO THE LOCATION OF PLANT MATERIAL MAY BE REQUIRED. NOTIFY COLEJENEST & STONE, P.A. IF DISCREPANCIES OCCUR.
9. ALL STRAPPING AND TOP 1/3 OF WIRE BASKET SHALL BE CUT AWAY AND REMOVED BY THE CONTRACTOR FROM ROOT BALL PRIOR TO BACKFILLING PLANTING PIT. CONTRACTOR SHALL REMOVE TOP 1/3 OF THE BURLAP FROM ROOT BALL.
10. FOR NEW TREE PLANTING AREAS WHERE THERE WAS EXISTING PAVEMENT, CONTRACTOR SHALL REMOVE ALL PAVEMENT, GRAVEL SUB-BASE AND CONSTRUCTION DEBRIS; REMOVE COMPACTED SOIL AND ADD 24" NEW PLANTING SOIL, OR AMEND THE TOP 24" OF EXISTING SOIL, TO MEET SPECIFIED PLANTING SOIL STANDARDS FOR TREES.
11. INSTALLER SHALL BE RESPONSIBLE TO REPAIR OR REPLACE PLANTINGS THAT FAIL IN MATERIALS, WORKMANSHIP, OR GROWTH WITHIN SPECIFIED WARRANTY PERIOD (ONE YEAR FROM DATE OF FINAL ACCEPTANCE BY OWNER).
12. CONTRACTOR SHALL REMOVE UNDERGROWTH AND WEEDS IN PLANTING AREA. CUT UNDERGROWTH FLUSH WITH GRADE; DO NOT GRUB. PRUNING SHALL BE PERFORMED IN ACCORDANCE TO NATIONAL ARBORIST ASSOCIATION STANDARDS.
13. IRRIGATION SYSTEM, IF REQUIRED BY OWNER, WILL BE HANDLED ON A DESIGN-BUILD BASIS BY OTHERS.

FEDERAL/EDWARD TEACH ROAD EDGE PLANTING PLAN

BALD HEAD ISLAND - PUBLIC WORKS | 50550.02 | BALD HEAD ISLAND, NC | 11.22.22




PLANTING SCHEDULE - STORAGE FACILITY

SHRUBS	BOTANICAL / COMMON NAME	CONT.	SIZE	SPACING
30	ILEX VOMITORIA / YAUPON HOLLY	CONT.	3-4' HT.	6' O.C.
60	MYRICA CERIFERA / SOUTHERN WAX MYRTLE	CONT.	3-4' HT.	6' O.C.
30	SABAL MINOR / DWARF SABAL	CONT.	18-24" HT.	4' O.C.

PLANTING NOTES

1. SIZE AND GRADING STANDARDS OF PLANT MATERIAL SHALL CONFORM TO THE LATEST EDITION OF "AMERICAN STANDARD FOR NURSERY STOCK", BY THE AMERICAN HORTICULTURE INDUSTRY ASSOCIATION, INC. (ANSI Z60.1).
2. HEIGHT AND WIDTH SPECIFICATIONS INDICATED ON PLANT SCHEDULE SHALL TAKE PRECEDENCE OVER CONTAINER SIZE.
3. CONTRACTOR SHALL MULCH ALL PLANTING BEDS WITH MULCH OBTAINED FROM VILLAGE OF BALD HEAD ISLAND STOCKPILE. CONTRACTOR TO COORDINATE SCHEDULE AND DISTRIBUTION OF MULCH WITH VILLAGE REPRESENTATIVE. MAINTAIN 2" CLEAR OF BASE OF TRUNK OR STEM.
4. CONTRACTOR SHALL REMOVE ALL CONSTRUCTION DEBRIS INCLUDING GRAVEL, ROOTS, LIMBS AND OTHER DELETERIOUS MATTER WHICH WOULD BE HARMFUL, OR PREVENT PROPER ESTABLISHMENT AND/OR MAINTENANCE OF LAWN AND PLANTING AREAS.
5. IN AREAS WHERE CONSTRUCTION GRAVEL IS EMBEDDED IN THE SOIL, CONTRACTOR SHALL REMOVE CONTAMINATED SOIL TO A DEPTH OF 8" AND FILL WITH CLEAN TOPSOIL. CONTRACTOR SHALL IMPORT TOPSOIL AT NO CHARGE TO OWNER IF REQUIRED TO FILL THESE EXCAVATIONS.
6. SEE SPECIFICATIONS FOR SOIL AMENDMENT, PREPARATION AND FERTILIZER REQUIREMENTS. FERTILIZER RATES TO BE PER SOIL TEST REPORTS.
7. ANY AREA NOT DIRECTED TO RECEIVE SEED OR SOD SHALL BE MULCHED.
8. ADJUSTMENTS TO THE LOCATION OF PLANT MATERIAL MAY BE REQUIRED. NOTIFY COLEJENEST & STONE, P.A. IF DISCREPANCIES OCCUR.
9. ALL STRAPPING AND TOP 1/3 OF WIRE BASKET SHALL BE CUT AWAY AND REMOVED BY THE CONTRACTOR FROM ROOT BALL PRIOR TO BACKFILLING PLANTING PIT. CONTRACTOR SHALL REMOVE TOP 1/3 OF THE BURLAP FROM ROOT BALL.
10. FOR NEW TREE PLANTING AREAS WHERE THERE WAS EXISTING PAVEMENT, CONTRACTOR SHALL REMOVE ALL PAVEMENT, GRAVEL SUB-BASE AND CONSTRUCTION DEBRIS; REMOVE COMPACTED SOIL AND ADD 24" NEW PLANTING SOIL, OR AMEND THE TOP 24" OF EXISTING SOIL, TO MEET SPECIFIED PLANTING SOIL STANDARDS FOR TREES.
11. INSTALLER SHALL BE RESPONSIBLE TO REPAIR OR REPLACE PLANTINGS THAT FAIL IN MATERIALS, WORKMANSHIP, OR GROWTH WITHIN SPECIFIED WARRANTY PERIOD (ONE YEAR FROM DATE OF FINAL ACCEPTANCE BY OWNER).
12. CONTRACTOR SHALL REMOVE UNDERGROWTH AND WEEDS IN PLANTING AREA. CUT UNDERGROWTH FLUSH WITH GRADE; DO NOT GRUB. PRUNING SHALL BE PERFORMED IN ACCORDANCE TO NATIONAL ARBORIST ASSOCIATION STANDARDS.
13. IRRIGATION SYSTEM, IF REQUIRED BY OWNER, WILL BE HANDLED ON A DESIGN-BUILD BASIS BY OTHERS.

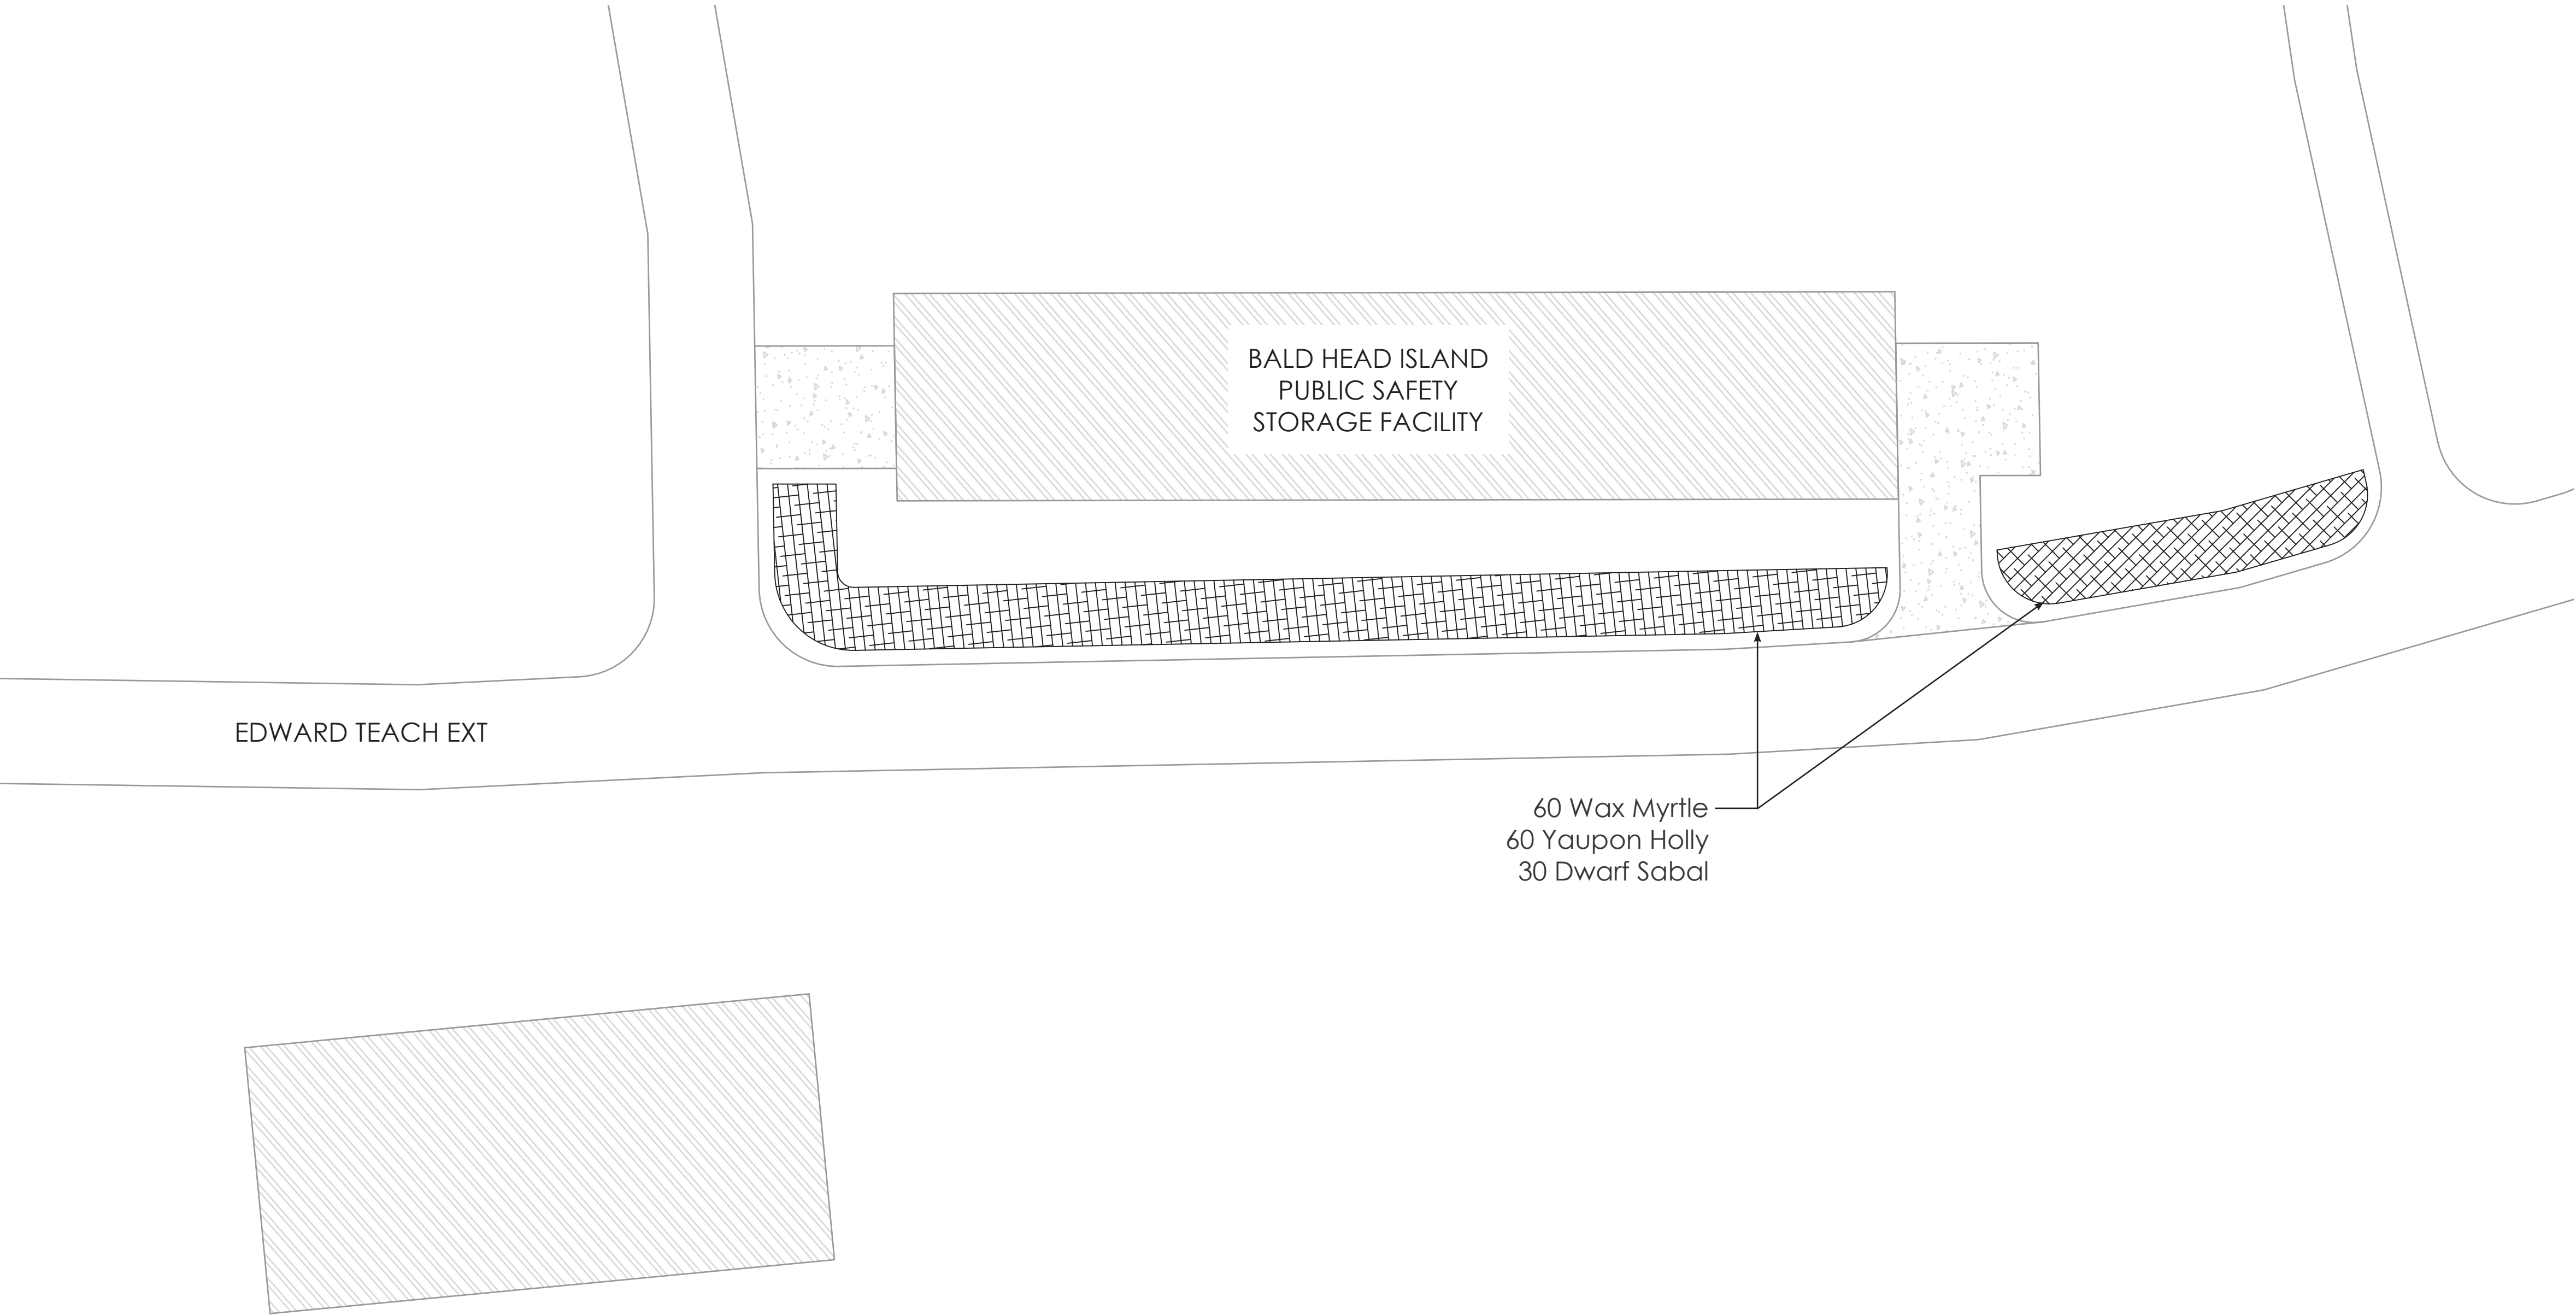

STORAGE FACILITY ROAD EDGE PLANTING PLAN

BALD HEAD ISLAND - PUBLIC WORKS | 50550.02 | BALD HEAD ISLAND, NC | 11.22.22



SHEET 2 OF 2

